
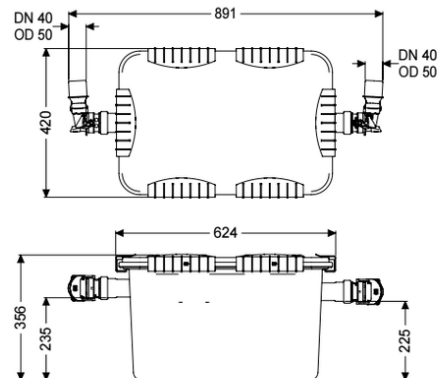


## Grease separator EasyClean free UnderSink, NS 0,7

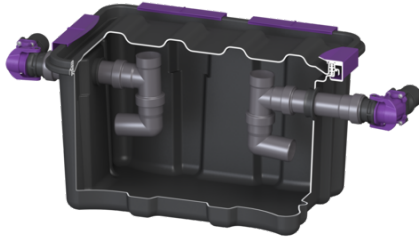

### Article information

Item no.: 93070.00US  
GTIN: 4026092096857  
Price group: 60

### Advantages

- Swivel connection
- no internal metallic components in the separator

### Description

This separator for greasy waste water is suitable for freestanding installation in frost-protected rooms below a sink. Free of any metal components, the collecting tank is made of durable plastic (PP) equipped with an integrated sludge trap. An odor-tight lid with a wrap-around seal and closure clip allows easy access during manual emptying and cleaning. The separator also has quick-release pipe connections for easy removal, and an inspection window for on-site installation is available as an option for visually checking the thickness of the grease layer.

#### Variant

|                                           |        |
|-------------------------------------------|--------|
| Seal:                                     | yes    |
| Sludge bucket:                            | no     |
| Nominal size (NS):                        | 0,7    |
| Refill inlet in accordance with DIN 1988: | no     |
| Type of disposal:                         | manual |
| Sampling device:                          | no     |

#### General characteristics

|                         |                                  |
|-------------------------|----------------------------------|
| Material:               | PP                               |
| Installation situation: | free-standing installation       |
| Delivery state:         | Modular set for assembly on site |

#### Dimensions

|                   |        |
|-------------------|--------|
| Net weight:       | 5,9 kg |
| Gross weight:     | 5,9 kg |
| Operating weight: | 38 kg  |

|                               |        |
|-------------------------------|--------|
| Empty weight:                 | 5 kg   |
| Set-up area, length:          | 891 mm |
| Set-up area, width:           | 420 mm |
| Set-up area, height:          | 356 mm |
| Required access area, length: | 624 mm |
| Packaging dimension:          | length |
| Packaging dimension:          | width  |
| Packaging dimension:          | height |

|                                             |        |
|---------------------------------------------|--------|
| Tank/drain body                             |        |
| Distance pipe bottom outlet to tank bottom: | 225 mm |
| Distance pipe bottom inlet to tank bottom:  | 235 mm |
| Outlet nominal size (OD):                   | 50 mm  |
| Outlet nominal size (DN):                   | 50 mm  |
| Inlet nominal size (DN):                    | 50 mm  |
| Inlet nominal size (DN):                    | 50 mm  |

|                   |              |
|-------------------|--------------|
| Coverage features |              |
| Cover locking:    | Clip closure |

|                                   |       |
|-----------------------------------|-------|
| Wastewater contents               |       |
| Separator contents:               | 21 l  |
| Max. grease layer thickness:      | 57 mm |
| Total volume:                     | 33 l  |
| Hose:                             | 12 l  |
| Storage quantity of light liquid: | 8 l   |